

SMITH INDUSTRIES, INC.
 D/B/A SMITH FENCE COMPANY
 4699 110TH AVENUE NORTH
 CLEARWATER, FL 33762
 PH: 727-573-5440
 FAX: 727-573-2075
 BOB HANKIN

DATE: April 18, 2019

INVOICE NO. ESTIMATE OF COSTS

ATTENTION: JOHN LINTON

ACCOUNT NO. PIN501

PINELLAS CO. - PURCHASING DEPARTMENT
 400 SOUTH FORT HARRISON
 6TH FLOOR
 CLEARWATER, FL 33756
 PH: 727-464-5323
 FAX: 727-464-3925
 JEANNE ARMSTRONG

BILL TO: PINELLAS COUNTY
 PARKS DEPARTMENT
 12520 ULMERTON ROAD
 LARGO, FL 33774

PH: 727-464-4348

FAX:

CELL:


E-MAIL: jlinton@pinellascounty.org

JOB: REPLACE CHAIN LINK FABRIC AND DAMAGED POSTS
 FOR PINELLAS TRAIL
 AT ORANGE STREET OVERPASS RAMPS

PINELLAS COUNTY BLANKET PURCHASE AGREEMENT #431932 & #431950

LINE	ITEM	DESCRIPTION	QTY.	UNIT	UNIT PRICE	AMOUNT
1	330.13.100357	HOURLY RATE MON-FRI OVERTIME & HOLIDAY	780	HR	\$ 147.00	\$ 114,660.00
2	962.46.102108	10% OFF ALL UNSPECIFIED WORK NOT LISTED ABOVE - SEE BELOW	1	EA	\$ 30,964.33	\$ 27,867.90
LIST OF UNSPECIFIED WORK TO BE DISCOUNTED			QTY.	UOM	PRICE	
		72" 6GA. BLACK (2" MESH) KK	1300	LF	\$ 7.80	\$ 10,140.00
		1-7/8" SECURITY FABRIC TIES	5100	EA	\$ 0.33	\$ 1,683.00
		2-3/8" SECURITY FABRIC TIES	2600	EA	\$ 0.37	\$ 962.00
		2-3/8 X 1-7/8" PS BOULEVARD CLAMP W/BOLTS	31	EA	\$ 7.43	\$ 230.33
		CUT, CORE DRILL, SET, WELD POST SECTION	31	EA	\$ 579.00	\$ 17,949.00
TOTAL AMOUNT TO BE DISCOUNTED						\$ 30,964.33

GRAND TOTAL	
\$	142,527.90
BOB HANKIN	

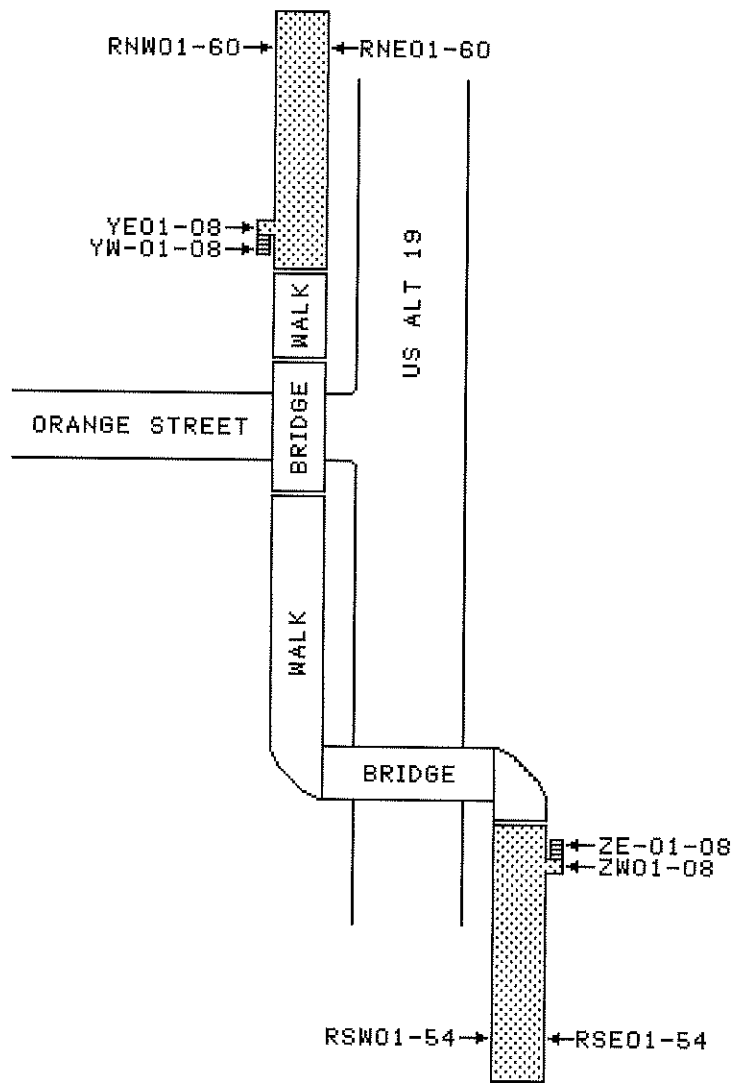

SMITH FENCE CO.
 4699 110TH AVE. NORTH
 CLEARWATER, FL 33762
 (727) 573-5440

PINELLAS TRAIL - ORANGE STREET OVERPASS
 PINELLAS COUNTY PARKS DEPARTMENT

DRAWN BY: 04/05/19	SCALE: NONE	PAGE:
REVISED: 04/18/19	FILE: BH041919	1 of 1

PINELLAS TRAIL OVERPASS AT ORANGE STREET

Thursday, April 18, 2019

ATTACHMENT "A"

NORTH RAMP

RNE-01	RNW04
RNE03	RNW15
RNE11	RNW40
RNE43	RNW43
RNE45	RNW45
RNE55	RNW56
RNE60	

NORTH STAIR

YE01	YW-01
YE02	YW01
YE03	YW02
YE04	YW03
YE05	YW04
YE07	YW05


SOUTH RAMP

RSE07	RSW04
RSE14	REW50
RSE17	
RSE36	
RSE43	

SOUTH STAIR

DAMAGED POST REPLACEMENT

TYPICAL

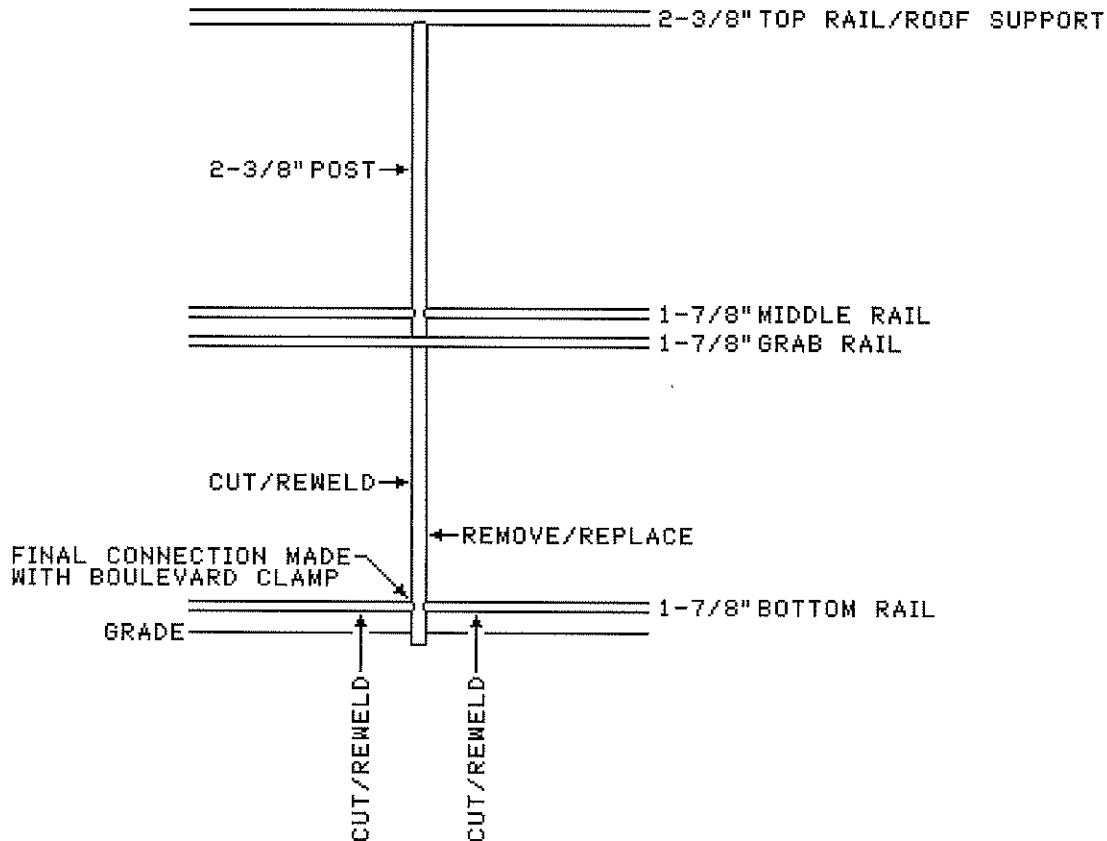

1. LOCATE DAMAGED POST
2. CUT POST AND BOTTOM RAIL
3. REMOVE DAMAGED SECTION OF POST
4. CORE DRILL POST STUMP AND REMOVE
5. FIT AND WELD NEW SECTION OF POST
6. SET POST IN EXISTING CONCRETE STRUCTURE WITH HYDRAULIC CEMENT
7. CHIP, WIRE BRUSH AND PAINT WELD WITH ZINC RICH PAINT
8. CAP POST CORE DRILL HOLE WITH SAND/CEMENT MIX, LIGHT BRUSH FINISH
9. MECHANICALLY REATTACH BOTTOM RAIL TO POST WITH BOULEVARD CLAMP



SMITH FENCE CO.
 4699 110TH AVE. NORTH
 CLEARWATER, FL 33762
 (727) 573-5440

ORANGE STREET OVERPASS POST REPLACEMENT
 PINELLAS TRAIL - PINELLAS COUNTY PARKS DEPARTMENT

DRAWN BY: 04/05/19
 REVISED: 04/18/19

SCALE: NONE
 FILE: BH041819

PAGE:
 1 of 1



ATTACHMENT “B” SCOPE OF WORK AND CONDITIONS

April 18, 2019
Pinellas County Parks
Pinellas Trail Overpass – Orange Street Bridge

OVERVIEW – Customer wishes to repurpose the existing ramp section of structure (approximately 1270 LF) not including the steel bridges, and to replace existing chain link fabric on both sides as well as repair damaged posts in the process.

WORK – SFC to provide material, equipment and labor necessary to remove the existing chain link fabric from both sides. Make repairs to the galvanized framework as noted on attachment “A”, thirty-one (31) posts and to install new #6 black vinyl coated chain link fabric on both sides. Security ties will be used on each side. This application will look very similar to what is there currently. See shop drawing “Damaged Post Replacement” for details. SFC will ensure the jobsite is neat, clean and secure prior to re-opening the trail in the morning.

NOTE –

- Work to be performed at night, when the trail is closed (dusk).
- This job is not certified payroll.
- MOT by others.